


MINKA

AIRE

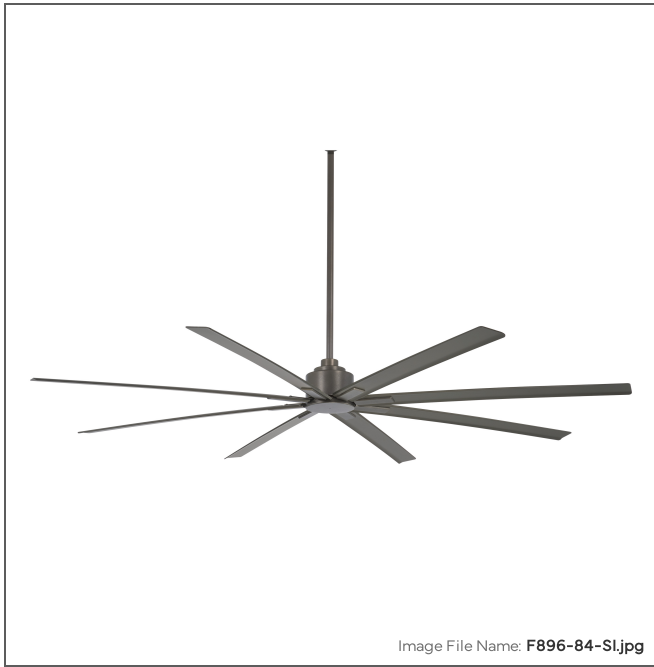

Xtreme H2O - 84" Ceiling Fan

| | |
|-----------------------|--|
| Item #: | F896-84-SI |
| UPC Code: | 706411058530 |
| Collection: | Xtreme |
| Category: | Interior, Exterior |
| Product Type: | Fan |
| Subtype: | Ceiling Fan |
| Descriptive Finish 1: | Smoked Iron |
| ETL Certificate: | 4009339 |
| Patents: | U.S. Patent(s): D832,990, D834,696; D877,883; D894,364; D918,376; D952,126 |
| Warranty Text: | Lifetime |



Bond Compatible



Energy Star®



WetLocation



ETL Listed

MEASUREMENTS

| | |
|--------------------------|-------------|
| Length: | 84 |
| Width: | 84 |
| Height: | 13.75 |
| Product Weight: | 24.25 |
| Ceiling to Blade: | 12.5 |
| Ceiling to Lowest Point: | 13.75 |
| Downrod Included: | Yes |
| Downrod Length 1: | 6 |
| Downrod Width 1: | 0.75 |
| Cord Length: | 80 |
| Wire Length: | 80 |
| Blade Finish: | Smoked Iron |
| Blade Material: | ABS |
| Slope: | Yes |
| Reversible Rotation: | Yes |
| Number of Blades: | 8 |
| Blade Pitch: | 9 |
| Blade Sweep: | 84 |
| Blade Length: | 84 |
| Reversible Blades: | No |
| Number of Speeds: | 6 |
| Motor Size: | 123x30mm |
| Motor Type: | DC |

LAMPING

| | |
|-----------------------|--------|
| LED: | No |
| Bulb Included: | No |
| Dimmable: | No |
| Light Kit Compatible: | Yes |
| Light Kit Included: | No |
| Light Kit Adapter: | K9886L |

CONTROLS

| | |
|---------------------------|---------|
| Pull Chain Control: | No |
| Remote Included: | Yes |
| Remote Control SKU: | RC400 |
| Wall Control Included: | No |
| Compatible Wall Controls: | WC400 |
| Integrated Smart Control: | No |
| Compatible Smart Control: | BD-1000 |

SHIPPING

| | |
|-------------------|-------|
| Cartons Per Unit: | 1 |
| Case Pack: | 1 |
| Ship Length: | 39.63 |
| Ship Width: | 10.25 |
| Ship Height: | 11.25 |
| Ship Weight: | 28.49 |
| Ship Volume: | 2.645 |
| Small Parcel: | Yes |

| | Low | L/M | Medium | M/H | High |
|-----------|--------|-----|--------|-----|--------|
| RPM | 31 | | | | 79 |
| Amps | 0.09 | | | | 0.57 |
| Watts | 5.71 | | | | 55.38 |
| CFM | 5150 | | | | 10989 |
| CFM/Watts | 901.93 | | | | 198.43 |